

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
28 June 2001 (28.06.2001)


PCT

(10) International Publication Number  
**WO 01/47313 A1**

- (51) International Patent Classification<sup>7</sup>: H04Q 7/38 (74) Agent: NORIN, Klas; Ericsson Radio Systems AB, Common Patent Department, S-164 80 Stockholm (SE).
- (21) International Application Number: PCT/SE00/02503
- (22) International Filing Date:  
12 December 2000 (12.12.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
09/467,707 20 December 1999 (20.12.1999) US
- (71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE).
- (72) Inventors: SÖDERKVIST, Jan; Österängsvägen 7, S-182 46 Enebyberg (SE). WAHLSTRÖM, Peter; Orrspelsvägen 92, S-167 66 Bromma (SE).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— With international search report.

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR EVALUATING A TIMESLOT IN A TDMA SIGNAL

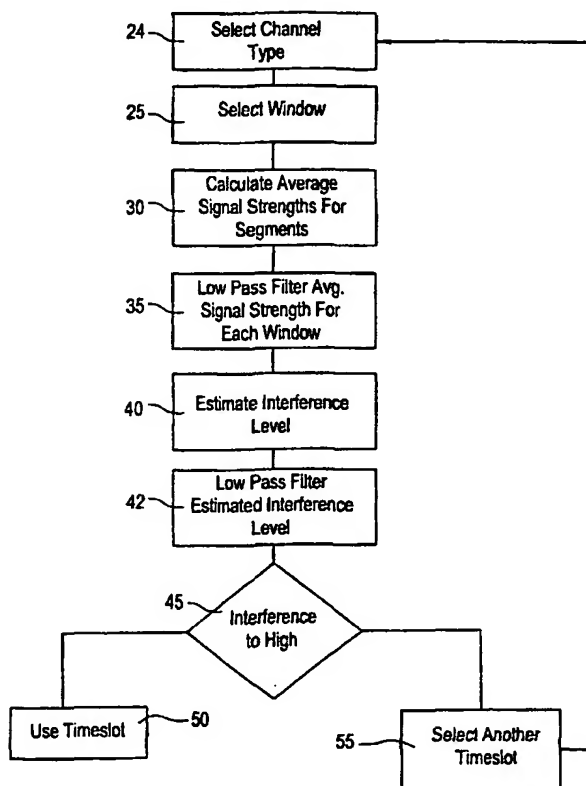

(57) Abstract: A method and apparatus for evaluating interference within a timeslot (65) of a received TDMA signal is described. An average received signal strength is calculated (30, 100) for a plurality of repeating segments (60, 70, 75, 80, 95) within a TDMA timeslot (65). The segment sizes are dependent upon the efficiency of the error correction coding scheme utilized by a selected channel type. The calculated received signal strengths for the plurality of the segments are applied (35) to a lowpass filter (110). The output of the lowpass filter is processed (40, 42) to determine the level of interference within the timeslot.



WO 01/47313 A1



— Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

## METHOD AND APPARATUS FOR EVALUATING A TIMESLOT IN A TDMA SIGNAL

### BACKGROUND OF THE INVENTION

#### 5           Technical Field of the Invention

The present invention relates to interference measurements within timeslots of a TDMA signal, and more particularly, to a method for evaluating a timeslot based upon an amount of interference within the timeslot.

#### Description of Related Art

10           In order to insure the quality of voice communications over a cellular communications network, the system must avoid cellular calls from being established on disturbed channels containing a level of interference that would degrade the quality of the calls to an unacceptable level. Interference in timeslots can be caused by co-channel interference from another transmitter sending on the same frequency but in  
15           another cell. The co-channel interferers are not necessarily slot-synchronized with the TDMA transmitters in this cell. In order to evaluate the disturbed channels, the interference level on selected channels must be measured to enable an estimation of how much the interference level would affect the quality of the call. The interference level on the downlink channels is difficult for the base station to check, unless  
20           specified means are included in the standard. The interference level on the uplink channels can be measured at the base station by monitoring received power levels in idle timeslots, i.e., timeslots not used by any mobile connected to that base station. This problem is more fully described in PCT application No. WO 97/31501, which is incorporated herein by reference.

25           Within analog systems, such as analog AMPS where one RF carrier is dedicated to one mobile station, a straightforward method for making this determination involves measuring and lowpass filtering the received signal strength on idle channels for each analog channel. For TDMA systems, the process is more complicated because interference supervision must be done for each timeslot. This  
30           problem is more fully illustrated in FIGURE 1 which illustrates an exemplary scenario

-2-

where an uplink channel frequency is divided into three timeslots 5, 10, 15 of which timeslot one 5 and timeslot two 10 are occupied by a first and a second transmitting mobile stations respectively, connected to the base station transceiver. Timeslot three 15 is idle and is disturbed by a co-channel interferer on the same frequency from a third transmitter in another cell. It will be noted that the interference provided by the co-channel interferer actually occurs over timeslots two 10 and three 15. This is because the second transmitter is not time synchronized/slot synchronized with the timeslots of the receivers for the present base station.

Existing methods of evaluating idle timeslots for e.g., determining whether or not co-channel interference should prevent the assignment of a call to a timeslot involve determining an average interference level for the entire timeslot. Since the unsynchronized interference does not occur over the entire time period of timeslot three 15, a determination may be made that the average interference level in timeslot three is low enough to permit a new call to be set up on the timeslot, even though the first portion of the timeslot is severely disturbed by the co-channel interference. This would present a serious problem for certain types of connections since the channel protection (forward error correction coding) may be weak, and the loss of even a few bits on the air interface may mean loss of the entire slot.

This problem arises because the average interference level determinations are made over the entire timeslot period while significant amounts of interference are only introduced in small portions of the timeslot. The problem is accentuated if those small portions contain critical information, such as bits used for error correction. Thus, prior art system have difficulty handling cases where unsynchronized strong interferers affect only portions of a timeslot since the slotwise interference averages will not give a true picture of the quality of the mobile station to base station voice connection provided by the timeslot at all points within the timeslot. Thus, some way for measuring timeslot interference that reflects the true impact of interference throughout the timeslot is desired.

30

-3-

## SUMMARY OF THE INVENTION

The present invention overcomes the foregoing and other problems with a method and apparatus for evaluating an idle timeslot within a TDMA signal by detecting interference within the timeslot. The interference is detected by measuring the received signal strength of disturbing signals. Initially, a channel type is selected and a segment or segment size is selected for a plurality of segment average calculations which will be performed throughout the TDMA timeslot. The size of the segment is dependent upon the efficiency of the error correction coding scheme used by the TDMA signal of the selected channel type. Alternatively, the selected segment size may vary within the timeslot depending upon the importance of information contained within particular portions of the timeslot. For example, larger segment sizes may be utilized where non-important information will be transmitted at the beginning of a timeslot, and smaller segments utilized with the more important following information.

Within each of a plurality of segments defined by the selected segment size throughout the timeslot, an average received signal strength is calculated. At least one of the calculated values of the average received signal strength from the plurality of calculated average received signal strengths is selected and input to a lowpass filter. The output of the lowpass filter may be compared to a selected threshold level to enable a determination of whether the idle timeslot interference is low enough to enable a connection utilizing the timeslot. If the filtered average received signal strength output by the lowpass filter exceeds a selected threshold value, an alternative slot must be selected for the connection. If the selected threshold value is not exceeded, the timeslot may be used for a call connection. Alternatively, the interference information may be stored for further analysis e.g., for supporting network optimization.

## BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding of the method and apparatus of the present invention may be obtained by reference to the following Detailed Description when taken in conjunction with the accompanying Drawings wherein:

-4-

FIGURE 1 is an illustration of received power and co-channel interference on a particular frequency at a base station;

FIGURE 2 is a flow diagram illustrating the method of the present invention;

FIGURES 3A-3D illustrate various embodiments of the segment described  
5 with respect to FIGURE 2; and

FIGURE 4 is a functional block diagram of an apparatus for performing the method of the present invention.

#### DETAILED DESCRIPTION

10 Referring now to the drawings, and more particular to FIGURE 2, there is illustrated a flow diagram describing the method for detecting the interference level within a particular timeslot and determining whether the interference level is high enough to render the timeslot unusable for a call connection (i.e., a disturbed timeslot). Initially, a channel type is selected at step 24 so that the modulation, channel coding  
15 and error correction of the channel are known. Based upon the selected channel type, a segment size for performing a plurality of average calculations over the timeslot is selected at Step 25. The segment size for the average calculations is selected dependent upon the strength of the error correcting code used for the transmissions from the mobile station to the base station. A strong channel coding scheme, for  
20 example, IS136 ACELP, could use a larger segment since the error correcting coding scheme may correct a large number of errors within a received signal. A typical segment size, suitable for a slot containing ACELP speech encoded and channel encoded information is 15 symbols (approximately 0.6 ms). A weaker channel coding scheme, for example, IS136 RLP1, would require the use of a smaller segment for the  
25 average calculations because less errors are able to be corrected by the coding scheme. Thus, the peak areas of interference throughout smaller portions of the timeslot must be determined.

Next, an average of the received signal strength is calculated at Step 30 for each segment defined by the selected segment size over the entire timeslot period (in  
30 IS136 approximately 6.7 ms). Alternatively, the average can be calculated over a selected part of the timeslot period. The segments may be selected in a number of

-5-

ways as illustrated in FIGURES 3A-3D. In FIGURE 3A, an average of the received signal strength (received power) is determined for multiple separate segments 60a-60f of the timeslot 65. Thus, for example, if the segment size 60 was 5 symbols long, an average of received signal strength would be determined for the first 5 symbols 60a (1-5), the second 5 symbols 60b (6-10), the third 5 symbols 60c (11-15), and so forth until the end of the timeslot 65 was reached. Alternatively, as illustrated in FIGURE 3B, a sliding window may be used by progressively moving the segment 70 through the timeslot 65 designating multiple overlapping segments. In this case, again assuming a 5 symbol segment 70, an average of the received signal strength over symbols 1-5 (70a) would be determined. Next an average of the received signal strength for symbols 2-6 (70b), 3-7 (70c), 4-8 (70d) and so forth would be determined until the end of the timeslot 65 was reached.

Additional variations in segment sizes, illustrated in FIGURES 3C and 3D, may also be used in response to the type of coding scheme used within the received signal and the structure of the timeslot 65 (i.e., the selected channel type). For stronger coding schemes, the size of the segment 75 may be increased as illustrated in FIGURE 3C. Alternatively, as shown in FIGURE 3D, different segment sizes 80 may be used in different parts of the timeslot 65. For example, in some channel coding schemes, the first portion of the timeslot 65 may be less important than the middle portion of the timeslot. Therefore, in the first portion of the timeslot 65 a larger segment size 80a, 80b may be used since interference within the first area does not create severe problems with the call connection, while a segment size 80c-80f within the following portions of the timeslot 65, containing the more important data, may be smaller to ensure detection of whether the interference level is too high, adversely affecting a call connection.

The determination of average signal strengths is repeated periodically and the resulting values are lowpass filtered for each segment. As will be more fully described in FIGURE 4, several average signal strengths for several segments are determined at one time. Each of the lowpass filtered average signal strengths for each segment is then used to estimate an interference level at Step 40. This process may be carried out in a number of methods and two particular embodiments are described below with

-6-

respect to FIGURE 4. The estimated interference level is lowpass filtered at Step 42. Alternatively, or in addition, the estimated interference level may be stored for further analysis, such as network optimization.

At inquiry Step 45, the output of the lowpass filter is checked to determine if the filtered average signal strength is above a preselected level. The preselected level may be fixed or vary responsive to a number of factors including, but not limited to, the capability of the mobile station, the current load in the cell (higher congestion implies that a higher level of interference may be accepted) and the modulation technique to be used. If the average signal strength does not exceed the preselected level, the timeslot is not sufficiently disturbed to prevent its use for a call connection, and the timeslot may be used at Step 50. If the filtered average signal strength exceeds the preselected level, an alternative timeslot must be selected at Step 55, and the above process is repeated to determine if the newly selected timeslot is satisfactory to support a call connection.

Referring now to FIGURE 4, there is illustrated a block diagram of an apparatus for estimating the interference levels as part of the idle slot supervision method described in FIGURE 2. The interference level estimating apparatus 85 includes a sample buffer 90 which stores digitized samples of the received signal strength within a plurality of segments 95. The sample buffer 90 contains segments 95 for one timeslot (6.67ms) and is refilled with new data once every 20ms. The various signal samples from the segments 95 are transmitted to average RSS calculation logic units 100 which determine an average received signal strength for the samples contained within particular segments. A new calculation takes place within the average RSS calculation logic units 100 for each new update of the buffer 90, i.e., once every 20ms. There is a separate average RSS calculation logic unit 100 for each segment 95 within the sample buffer 90. The segments 95 within the sample buffer 90 may be of different sizes or even overlapping as discussed earlier with respect to FIGURE 3.

Each average RSS calculation logic unit 100 provides an output value each 20ms. This value is provided to a lowpass filter 110. The lowpass filter 110 removes the fast random variations (greater than 0.5Hz) in the average received signal strength



-7-

of the segments caused by fading (e.g., Rayleigh fading). Each lowpass filter 110 may be implemented as a simple first order lowpass filter with a time constant in the order of 1 to 2 seconds. The output of the lowpass filter 110 is a slow varying (less than 0.5Hz) signal strength value 115 for the associated segment 95.

5           The slow varying signal strength value 115 for each segment 95 is input to interference level estimator logic 120. The interference level estimator logic 120 processes the outputs from each of the lowpass filters 110 and outputs an estimated interference level 125. The interference level estimator 120 may be implemented in a number of ways. Two alternative methods are proposed below. However, it should  
10           be realized by one skilled in the art that the invention is not limited to these particular implementations.

          In a first alternative, a simple "peak find" method may be used. In this method, the outputs of the lowpass filters 110 are examined and a current maximum value S4 is determined according to the equation

15

$$S4 = \underset{i=1..N}{MAX} (\alpha_i \cdot S3_i)$$

where; N = number of segments the slot has been divided into;

S3<sub>i</sub> = filtered RSS average for segment number i; and

          α<sub>i</sub> - weighting factor for segment number i. The weighting factor is chosen  
20           depending on the relative importance of the bits inside that particular segment for a selected channel type.

          A second alternative works under the principle that any co- or adjacent channel interference within the segment is likely caused by other TDMA transmitters using bursts with the same length as the slot being checked. However, interferers are not slot  
25           synchronized with the checked slot and will either interfere at the beginning or ending of the slot. Since it is not known how far into the slot, either from the beginning or from the end of the slot, the interference stretches, the following equation may be used as an edge detection feature for determining how far the interfering signals extends  
30           within the checked timeslot. Thereby, only the disturbed part of the timeslot may be included in the calculations.

-8-

$$S4 = \text{MAX} \left( \text{MAX}_{n=1..N} \left( \frac{\sum_{i=1}^n \alpha_i S3_i}{\sum_{i=1}^n \alpha_i} \right), \text{MAX}_{n=1..N} \left( \frac{\sum_{i=1}^n \alpha_{N-i} S3_{N-i}}{\sum_{i=1}^n \alpha_{N-i}} \right) \right)$$

If all  $\alpha = 1$ , e.g., if all segments are equally important, then this equation can be simplified to:

$$5 \quad S4 = \text{MAX} \left( \text{MAX}_{n=1..N} \left( \frac{1}{n} \sum_{i=1}^n S3_i \right), \text{MAX}_{n=1..N} \left( \frac{1}{n} \sum_{i=1}^n S3_{N-i} \right) \right)$$

which can be expanded into:

$$S4 = \text{MAX}(X_0, X_1, X_2, \dots, Y_0, Y_1, Y_2, \dots)$$

where;

$$X_0 = S3_0$$

$$10 \quad X_1 = \text{MAX} \{S3_0, \frac{1}{2}(S3_0 + S3_1)\}$$

$$X_2 = \text{MAX} \{S3_0, \frac{1}{2}(S3_0 + S3_1), \frac{1}{3}(S3_0 + S3_1 + S3_2)\}$$

$$Y_0 = S3_N$$

$$Y_1 = \text{MAX} \{S3_N, \frac{1}{2}(S3_N + S3_{N-1})\}$$

15

The output of the interference level estimator logic 120 can be stored for use as statistics in analyzing slot behavior, e.g., for supporting network optimization work, or for decisions on whether a timeslot may be used for calls (unusable timeslots are temporarily "sealed"). The output of the interference level estimator logic 120 will fluctuate due to slow fading and may cause oscillations in the system, e.g., slots jumping back and forth from "sealed". In order to prevent these oscillations of slots from sealed to unsealed status, a lowpass filter 130 is connected to the output of the interference level estimator logic 120. The time constant on the lowpass filter 130 is in the order of 10 seconds.

-9-

The response time for the entire interference estimation apparatus 85 is provided by the time constants of the lowpass filters 110 and 130 within the apparatus. The time constants of lowpass filters 110 and 130 may be selected depending upon the type of traffic within a particular cell (i.e., stationary mobiles, slow moving mobiles,  
5 highway moving mobiles). Other filter types may also be used., e.g., higher order lowpass filters, prediction filters, etc.

If the timeslot can carry traffic with differing requirements for interference levels, for example, within ACELP voice channels using strong channel coding or RLP1 encoded channels using weaker channel coding, different segment sizes and/or  
10 time constants of lowpass filters 110 and 130 may be needed for the different channel encoding schemes. In a typical IS136 system, the channel coding scheme to be used for a call, depending on different factors such as mobile station capability, is only known just prior to the call being setup. Thus, it is then too late to start measuring the interference levels of the timeslots. In order to overcome this problem, interference  
15 level estimations may be performed, for example, for both an ACELP encoded call and a RLP1 encoded call using a pair of interference level estimators 85. The estimators 85 will run in parallel whenever a timeslot is idle. Just prior to call setup the traffic control system (not shown) selects which output of an estimator 85 to use.

The previous description is of a preferred embodiment for implementing the  
20 invention, and the scope of the invention should not necessarily be limited by this description. The scope of the present invention is instead defined by the following claims.

-10-

## WHAT IS CLAIMED IS:

1. A method for evaluating an idle timeslot of a received TDMA signal by estimating an interference level within the timeslot, comprising the steps of:  
calculating an average received signal strength for each of a plurality  
5 of repeating segments within the timeslot; and  
estimating the interference level based on at least one of said calculated average received signal strengths.
2. The method of Claim 1 further comprising the step of selecting a  
10 channel type for the timeslot of the received TDMA signal.
3. The method of Claim 2, further including the step of selecting a size for the plurality of repeating segments responsive to the selected channel type.
- 15 4. The method of Claim 3, wherein the step of selecting is responsive to an error correction encoding scheme used by the selected channel type.
5. The method of Claim 2 further including the step of selecting a plurality of sizes for the plurality of repeating segments, wherein the selected size of a segment  
20 is responsive to a position of the segment within the timeslot and the selected channel type.
6. The method of Claim 1, wherein the step of estimating further comprises the step of selecting a highest value of the calculated average received  
25 signal strengths to determine the interference level within the timeslot of the received TDMA signal.
7. The method of Claim 1 further including the step of lowpass filtering the estimated interference level.

30

-11-

8. The method of Claim 1 further including the step of lowpass filtering at least one of the calculated average received signal strengths.

5 9. The method of Claim 1, wherein the step of calculating further comprises calculating a received signal strength for a plurality of overlapping, repeating segments.

10 10. The method of Claim 1, wherein the step of calculating further comprises calculating a received signal strength for a plurality of sequential, repeating segments.

11. The method of Claim 1, wherein the step of calculating further comprises applying a weighting factor for each of the segments.

15 12. The method of Claim 11, wherein said weighting factor for each of the segments is selected based on the slot position of the segments.

20 13. The method of Claim 1, further comprises the steps of:  
comparing the estimated interference level to a selected threshold level;  
establishing a connection on the timeslot if the interference level does not exceed the threshold level; and  
selecting another timeslot if the interference level exceeds the threshold level.

25 14. The method of Claim 6, wherein the step of selecting further comprises the steps of:  
comparing each of the calculated average signal strengths to each other;  
and  
determining an average value for the calculated average received signal  
30 strength responsive to the step of comparing.

-12-

15. The method of Claim 1, wherein the step of selecting further comprises the steps of:

determining a portion of the TDMA timeslot subject to interference;

and

5 determining an average value for the calculated received signal strengths within this portion.

16. A method for selecting a timeslot of a received TDMA signal for a connection, comprising the steps of:

10 selecting a segment size for a plurality of segment average calculations;

calculating an average received signal strength within each of a plurality of segments in the timeslot, said segments defined by the selected segment size;

15 lowpass filtering each of the calculated average received signal strengths;

estimating the interference level based on at least one of said calculated and filtered average received signal strengths;

lowpass filtering the estimated interference level;

20 comparing the interference level to a selected threshold level;

establishing a connection on the timeslot if the interference level does not exceed the threshold level; and

selecting another timeslot, if the interference level exceeds the threshold level.

25

17. The method of Claim 16 further comprising the step of selecting a channel type for the timeslot of the received TDMA signal.

18. The method of Claim 16 wherein the step of estimating further comprises the step of selecting a highest value of the calculated average received

30

-13-

signal strengths to determine interference levels within the timeslots of the received TDMA signal.

19. The method of Claim 17, wherein the step of selecting a segment size  
5 is responsive to an error correction encoding scheme used by the selected channel type.

20. The method of Claim 18 further including the step of selecting a plurality of sizes for the plurality of repeating segments, wherein the selected size of a segment is responsive to a position of the segment within the timeslot.

10

21. The method of Claim 16, wherein the step of calculating further comprises calculating a received signal strength for a plurality of overlapping, repeating segments.

15 22. The method of Claim 16, wherein the step of calculating further comprises calculating a received signal strength for a plurality of sequential, repeating segments.

20 23. The. method of Claim 16, wherein the step of calculating further includes the step of applying a weighting factor to each of the segments.

24. The method of Claim 23, wherein said weighting factor for each of the segments is selected based on a slot position of the segments.

25 25. The method of Claim 18, wherein the step of selecting further comprises the steps of:

comparing each of the calculated average signal strengths to each other;

and

25 determining a maximum value for the calculated average received  
30 signal strength responsive to the step of comparing.

-14-

26. The method of Claim 25, wherein the step of selecting further comprises the steps of:

determining a portion of the TDMA timeslot subject to interference;

and

5 determining an average for the calculated received signal strengths within this portion.

27. An apparatus for estimating an interference level on a timeslot of a TDMA signal, comprising:

10 a buffer for storing a plurality of repeating groups of data from the timeslot;

logic for determining an average received signal strength for each of the plurality of repeating groups of data; and

15 an estimator for estimating the interference level responsive to the average received signal strengths for each of the plurality of repeating groups of data.

28. The apparatus of Claim 27 further comprising a first plurality lowpass filters for filtering each of the average received signal strengths.

20 29. The apparatus of Claim 27 further comprising a second lowpass filter for filtering the estimated interference level.


30. The apparatus of Claim 27, wherein the estimator further compares each of the calculated average signal strengths to each other and determines a maximum value for the calculated average received signal strength responsive to the step of comparing.

31. The apparatus of Claim 27, wherein the estimator further determines a portion of the TDMA timeslot subject to interference, and determines an average value for the calculated received signal strengths within this portion.

30




FIG. 1

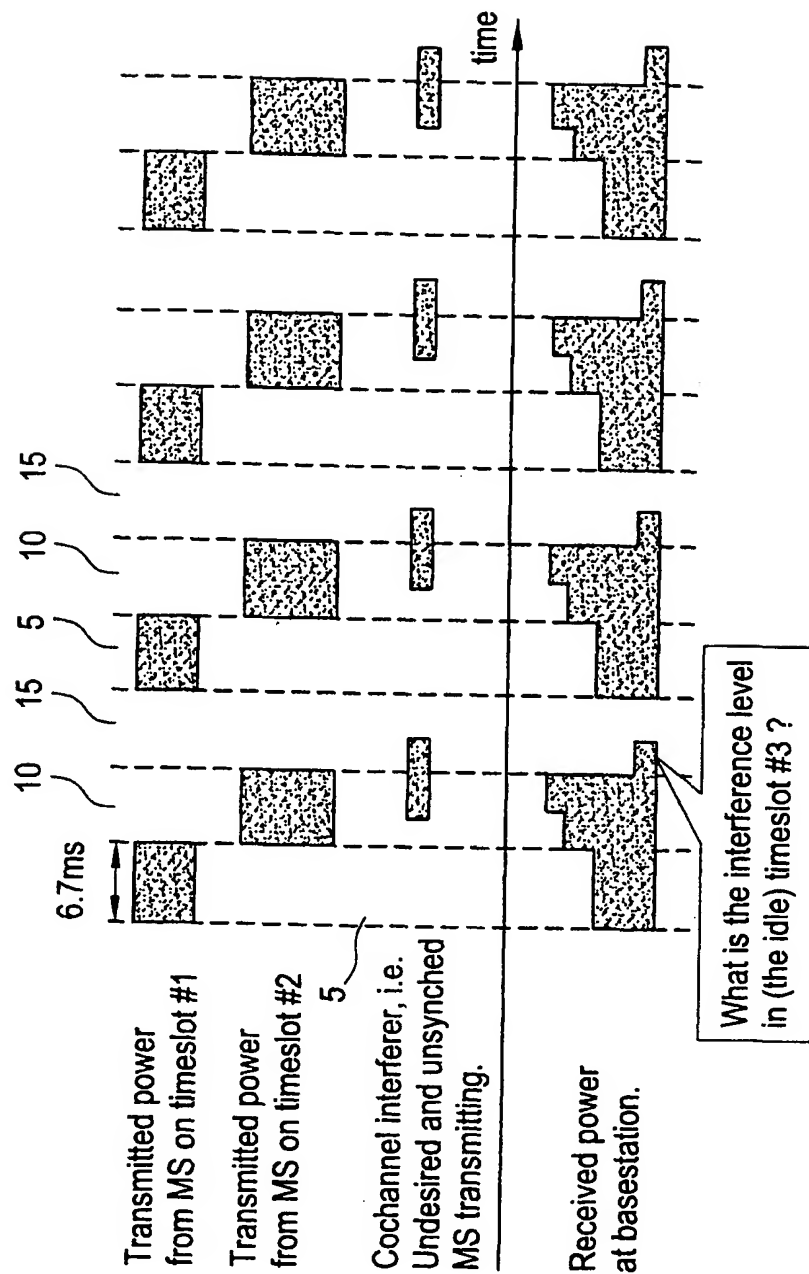

2/4

FIG. 2

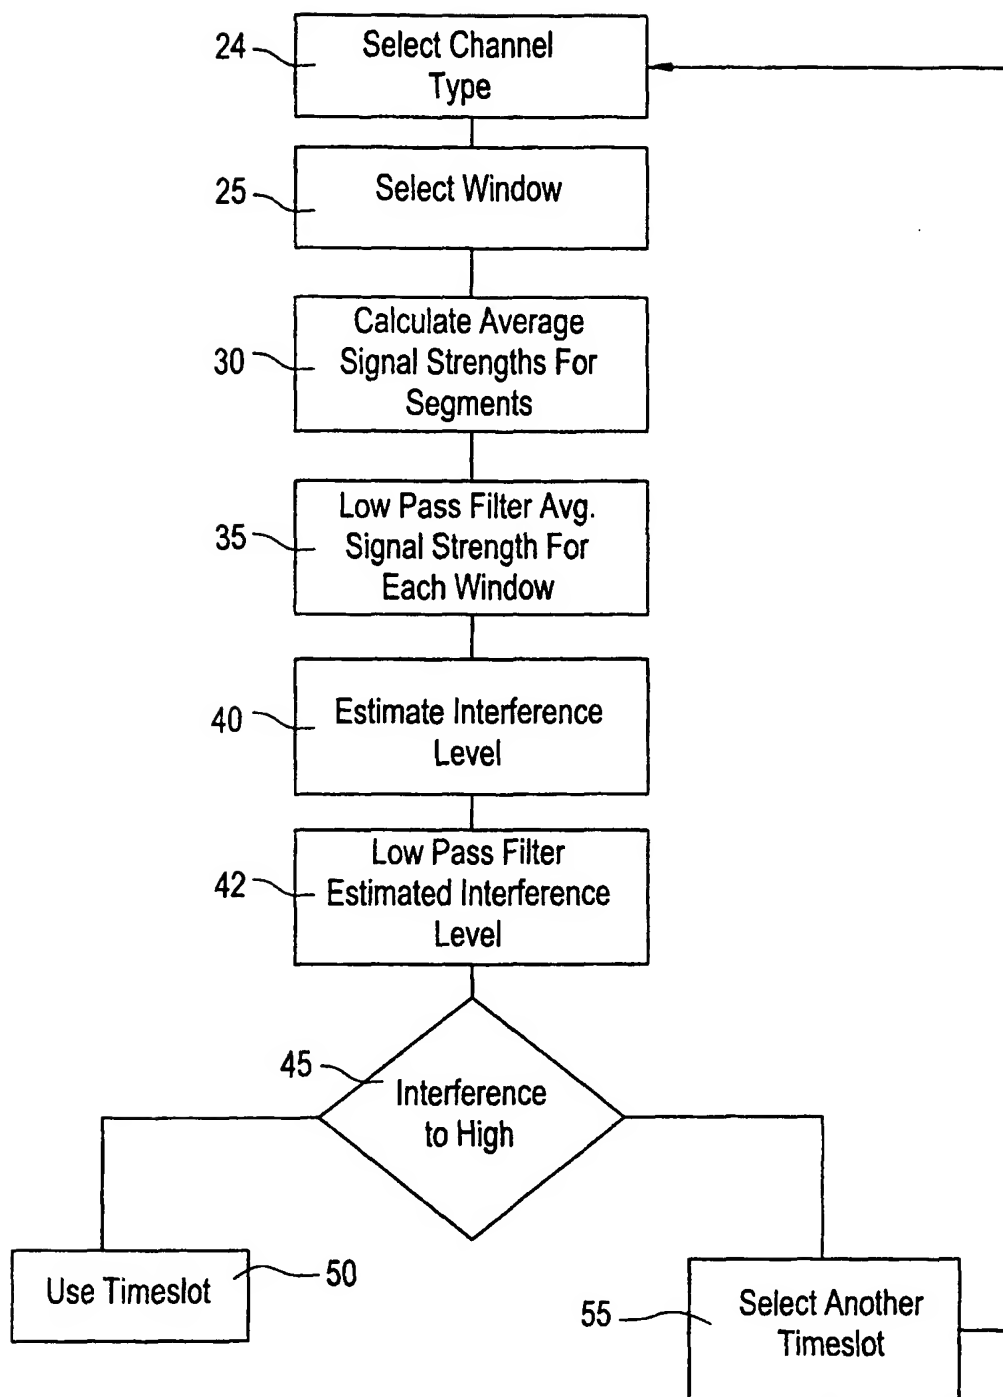

3/4

FIG. 3A

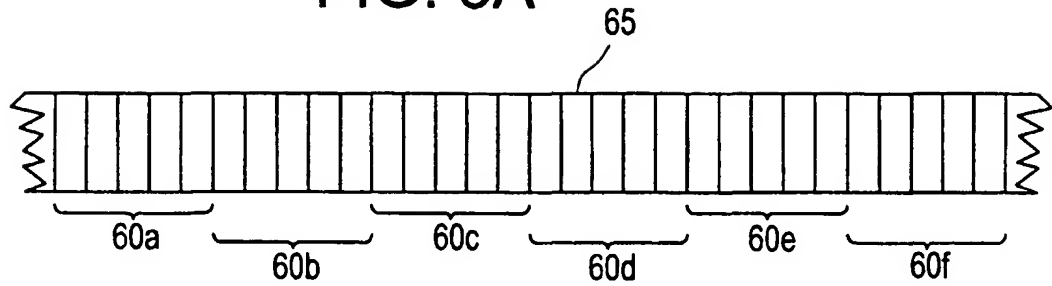


FIG. 3B

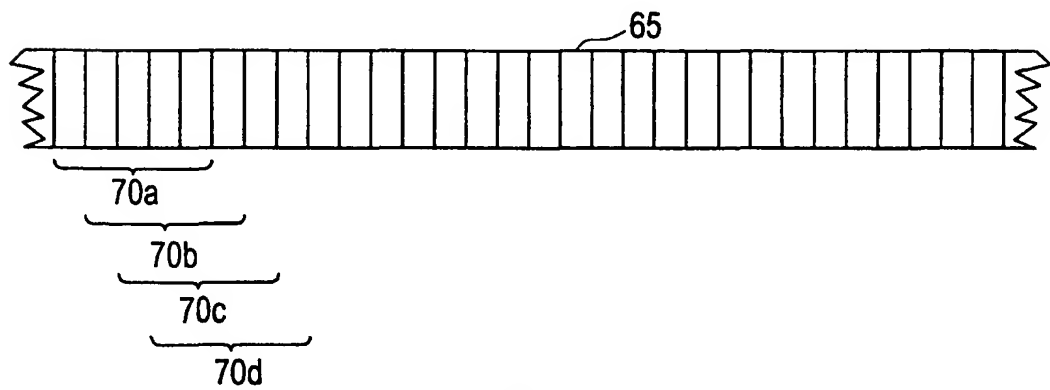


FIG. 3C



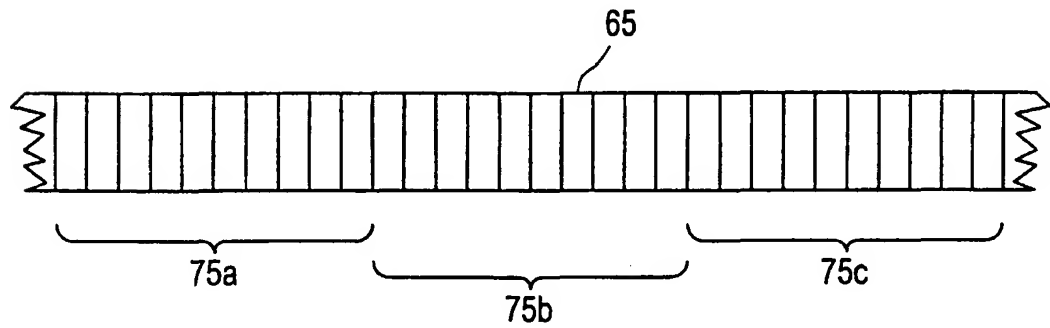


FIG. 3D

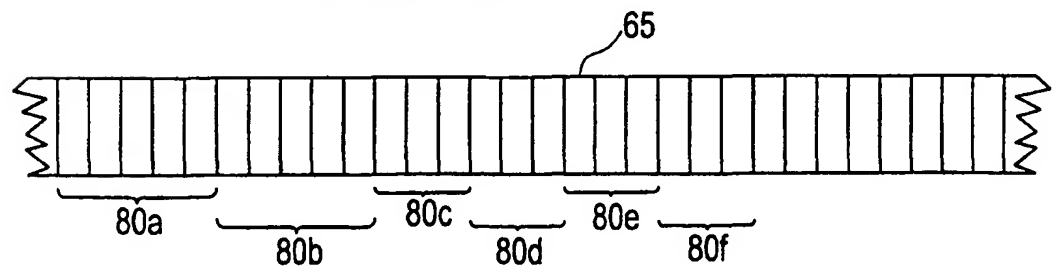

4/4

FIG. 4

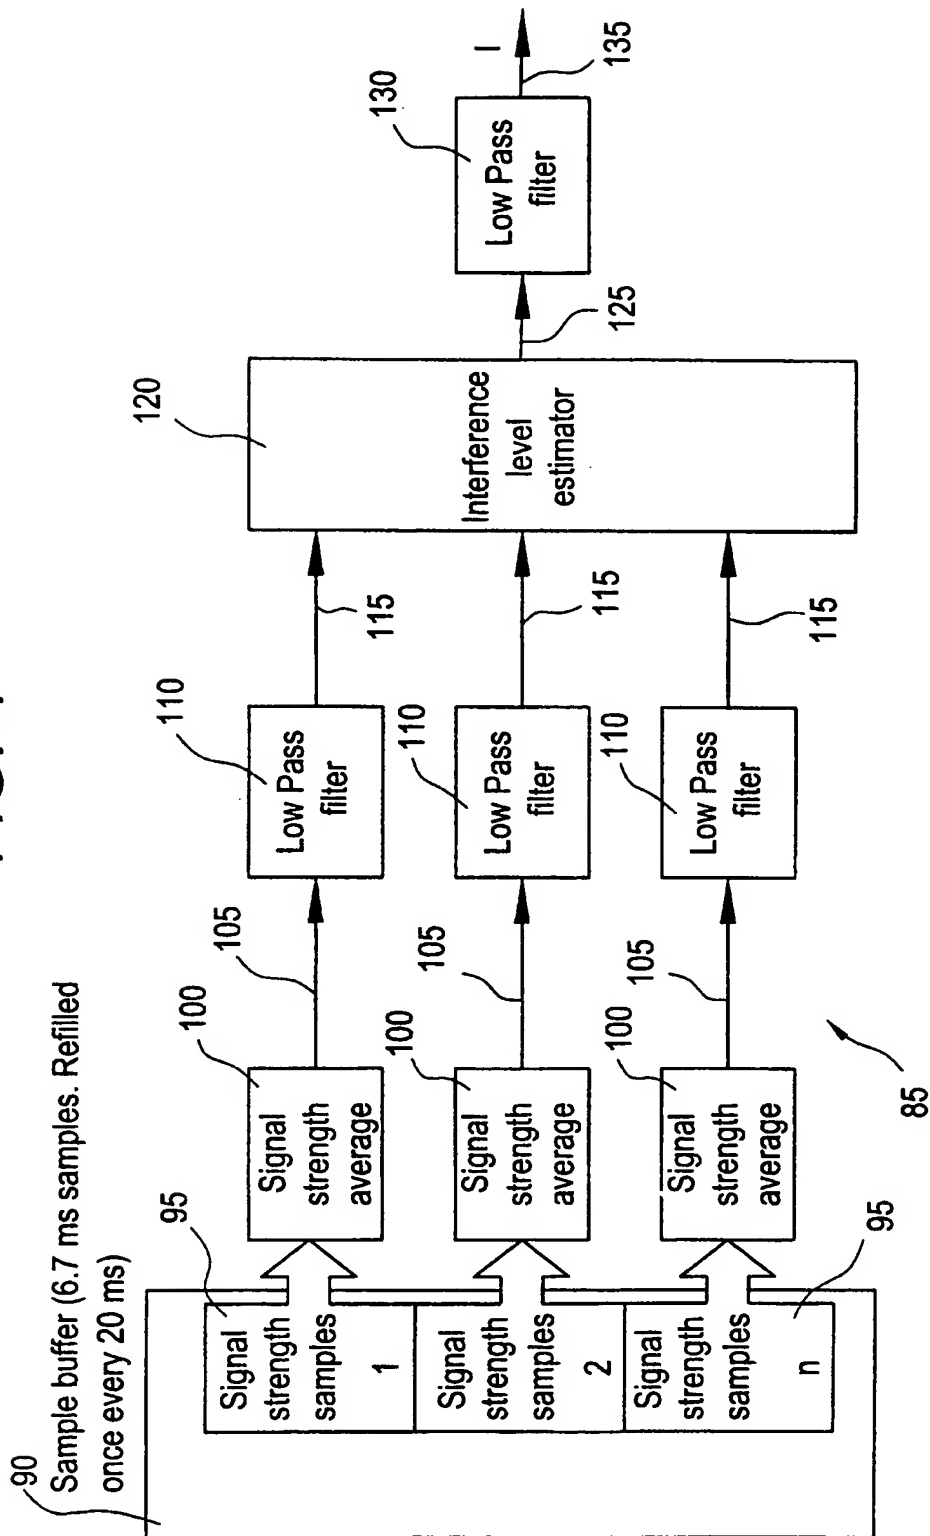

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/SE 00/02503

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 H04Q7/38

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 H04Q H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97 31501 A (ERICSSON TELEFON AB L M) 28 August 1997 (1997-08-28) cited in the application page 14, line 4 - line 22	1-3,10, 13-15,27
Y	page 15, line 20 -page 16, line 14 page 17, line 8 - line 21 page 18, line 11 - line 20 ----- -/--	5-9, 16-18, 20-22, 24-26, 28-31

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

12 April 2001

Date of mailing of the international search report

20/04/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Heinrich, D

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 00/02503

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 98 27684 A (ERICSSON GE MOBILE INC) 25 June 1998 (1998-06-25)  page 8, line 18 - line 26 page 9, line 27 -page 10, line 4 -----	5-9, 16-18, 20-22, 24-26, 28-31
A	US 5 157 709 A (OHTERU YOUICHI) 20 October 1992 (1992-10-20) column 3, line 5 - line 17 column 4, line 33 - line 42 -----	1-31

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/SE 00/02503

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9731501 A	28-08-1997	US 6006092 A	21-12-1999
		AU 720973 B	22-06-2000
		AU 2237797 A	10-09-1997
		BR 9707728 A	06-04-1999
		CA 2246324 A	28-08-1997
WO 9827684 A	25-06-1998	US 6023477 A	08-02-2000
		AU 5896898 A	15-07-1998
		BR 9713746 A	21-03-2000
US 5157709 A	20-10-1992	JP 2312492 A	27-12-1990
		GB 2234142 A,B	23-01-1991